



NEW!


Energy Efficient LED Technology

As low as **18 TOTAL WATTS PER UNIT!**

NVS LED

SIGNAL

WARNING LUMINAIRES

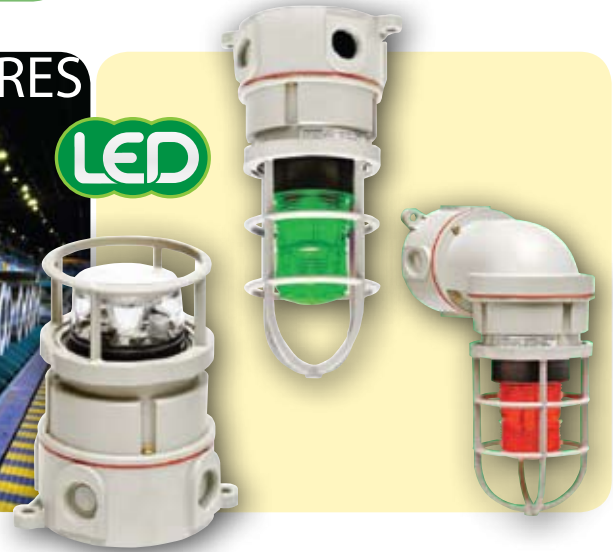

FEATURES/APPLICATIONS

These new signal luminaires can be excellent warning devices in corrosive, wet NEMA 4X harsh environments and in hazardous locations. Ideal applications include manufacturing plants, chemical and petrochemical processing facilities, sewage treatment plants, off-shore and dockside installations, agricultural, commercial, industrial, mining and marine facilities.

SPECIFICATIONS

- NVS Series LED with very compact profile and 50,000 hours expected life; steady-on or flashing
- NVSZ Series Zenon with 10,000 hours expected life, flashing only
- LED utilizes inverted cone design to provide full 360° coverage for more light projection
- LED and Zenon available in five colors: red, green, amber, blue, and clear
- Flash rate 75 flashes per minute (LED) and 60 to 80 flashes per minute (Zenon)
- Can be mounted in any orientation including lens in the UP or SIDE positions
- Luminaire housings combine an outstanding balance of strength, stiffness, toughness, and electrical properties
- Molded from 30% glass-filled thermoset polyester for high strength
- Resists corrosive effects of most chemicals, hydrocarbons, and solvents
- UL 1598 Standard; UL 1598A Marine; UL 844 Standard; UL 1638 Standard; CSA C22.2 no. 137-M1981; Enclosed & Gasketed, NEMA 3, 4X; IP66
- Class I, Div. 1/2, Groups C, B, C, D; Class I, Zone 2, Groups IIC, IIB, IIA; Class II, Div. 1/2, Groups F, G; Class III



ORDERING INFORMATION

	3/4" Pendant	Amber	Red	Green	Blue	Clear
LED	Flashing 120-240VAC	NVSLCFG25AAG	NVSLCFG25RAG	NVSLCFG25GAG	NVSLCFG25BAG	NVSLCFG25CAG
	Flashing 12-80VDC	NVSLCFG26AAG	NVSLCFG26RAG	NVSLCFG26GAG	NVSLCFG26BAG	NVSLCFG26CAG
Zenon	Flashing 120VAC	NVSMFG01AAG	NVSMFG01RAG	NVSMFG01GAG	NVSMFG01BAG	NVSMFG01CAG
	Flashing 12-80VDC	NVSMFG26AAG	NVSMFG26RAG	NVSMFG26GAG	NVSMFG26BAG	NVSMFG26CAG
	3/4" Ceiling	Amber	Red	Green	Blue	Clear
LED	Flashing 120-240VAC	NVSLCFG25AXG	NVSLCFG25RXG	NVSLCFG25GXG	NVSLCFG25BXG	NVSLCFG25CXG
	Flashing 12-80VDC	NVSLCFG26AXG	NVSLCFG26RXG	NVSLCFG26GXG	NVSLCFG26BXG	NVSLCFG26CXG
Zenon	Flashing 120VAC	NVSMFG01AXG	NVSMFG01RXG	NVSMFG01GXG	NVSMFG01BXG	NVSMFG01CXG
	Flashing 12-80VDC	NVSMFG26AXG	NVSMFG26RXG	NVSMFG26GXG	NVSMFG26BXG	NVSMFG26CXG
	3/4" Wall	Amber	Red	Green	Blue	Clear
LED	Flashing 120-240VAC	NVSLCFG25ABG	NVSLCFG25RBG	NVSLCFG25GBG	NVSLCFG25BBG	NVSLCFG25CBG
	Flashing 12-80VDC	NVSLCFG26ABG	NVSLCFG26RBG	NVSLCFG26GBG	NVSLCFG26BBG	NVSLCFG26CBG
Zenon	Flashing 120VAC	NVSMFG01ABG	NVSMFG01RBG	NVSMFG01GBG	NVSMFG01BBG	NVSMFG01CBG
	Flashing 12-80VDC	NVSMFG26ABG	NVSMFG26RBG	NVSMFG26GBG	NVSMFG26BBG	NVSMFG26CBG

HAZARDOUS LOCATION SUITABILITY

Source	CLI Div. 2	CL2 Div. 1
	Operating Temp. Code	Groups
LED	T6	F, G
Zenon	T2C	F, G