



## INSTRUCTIONS FOR INSTALLATION OF LIGHTWATT® GLARE SHIELD

Catalog Number: LW-GS  
Accessory Attachment to All  
Lightwatt® Fixtures

Please Read Thoroughly Before Installing



**WARNING:** When installing, relamping or otherwise servicing this fixture in any way, observe all precautions usually followed when dealing with high voltage equipment. Disregarding these precautions may result in electrical shock and possible injury to individual servicing the equipment. Never connect or disconnect any component while the power supply is ENERGIZED.

### GENERAL INSTRUCTIONS - SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE.

1. Upon receipt of this accessory, thoroughly inspect it for any freight damage and if it is found, the carrier should be notified and held accountable.
2. It is not necessary to remove the lens to install this accessory.

### INSTALLATION INSTRUCTIONS

1. A section of gasket is supplied to be added between the glare shield and the housing to prevent unwanted light leaks.
2. Install gasket to the downward facing rim of the fixture housing.
3. Carefully push the groove in the gasket over the rim of the housing. Make sure the angled flange on the gasket faces outward from the fixture housing.
4. Cut off any excess gasket material with scissors, after it is installed completely around the housing.
5. Disregard Steps 1-4 if gasket is not desired. Proceed with Steps 6-11 to install glare shield.

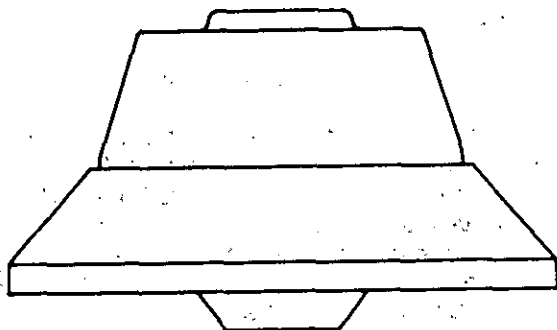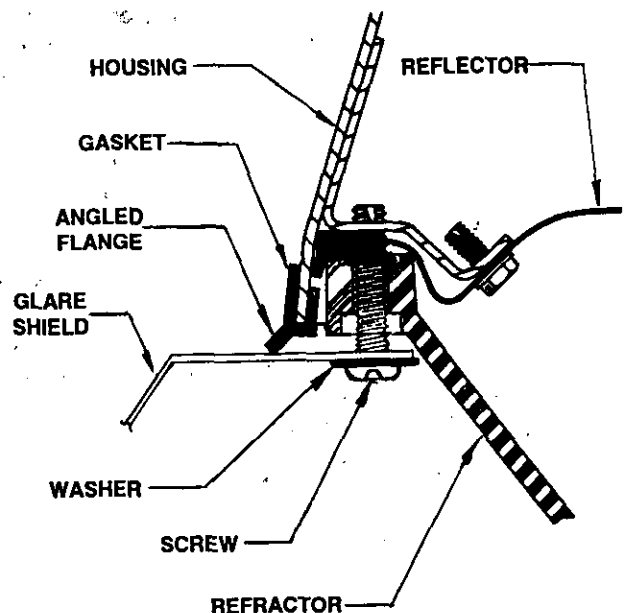

6. Remove two (2) screws on opposite sides that retain the reflector.
7. Place glare shield up under fixture and align the four (4) holes in the flange with the reflector mounting holes.
8. Place a flat washer (supplied) over two (2) of the reflector mounting screws (just removed). If four (4) longer screws are supplied, use these instead. A 1" long screw works well.
9. Install these two (2) screws with washers under the screw head into the open reflector mounting hole locations. Loosely tighten these screws to hold the reflector and glare shield in place while Step 10 is performed.
10. Remove the other two (2) screws holding the reflector by carefully backing them through the now aligned holes in the glare shield flange.
11. Repeat Steps 8 and 9.
12. Tighten all four (4) mounting screws with washers in place under their heads, to secure the glare shield in place on the fixture.



Hubbell Lighting, Inc.  
A Subsidiary of Hubbell Incorporated  
2000 Electric Way  
Christiansburg, VA 24073-2500  
(703) 382-6111  
FAX (703) 382-1526



ORIGINAL DRAWING