

PERIMALITER®
PGM2
 HAZARDOUS WALLPACK

Cat. #		Approvals
Job	Type	



APPLICATIONS


- Walkways, catwalk, perimeter and security lighting.

SPECIFICATIONS

- Five-to-one spacing-to-mounting-height ratio minimizes fixture requirements.
- Hinging front door provides full front access.
- -40°F starting for HPS; -20°F for PS. 40°C ambient.
- Housing is copper-free (<0.4%) aluminum with bronze Lektrocote® finish.
- Lens is thermal shock and impact resistant.
- Fasteners are HubbellGard® hex head.
- Two 1/2" NPT conduit entries on either side.

LISTINGS

- Class I, Division 2: Groups A, B, C, D / Class I, Zone 2, Group IIC, IIB and IIA.
- UL 844 hazardous and 1598 wet location listed / CSA C 22.2 No. 137-M1981.
- NEMA 4X.

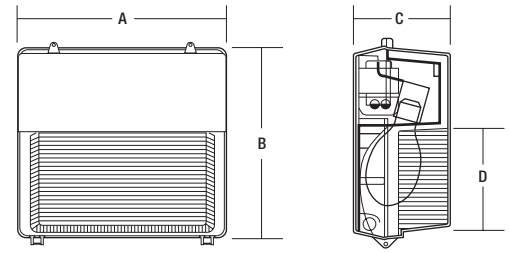

A	B	C	D
14 1/2"	14"	7 1/8"	6"
368 mm	356 mm	181 mm	152 mm

ORDERING INFORMATION

CATALOG NUMBER	WATTAGE & ANSI CODE	VOLTAGE/BALLAST	WEIGHT		T-CODE @ 40°C
			lbs.	kg	
METAL HALIDE/PULSE START					
PGM2-P078	70W (M-98)	Quad-Tap®	23	10.4	T2D-215°C
PGM2-P108	100W (M-90)	Quad-Tap®	24	10.9	T2D-215°C
PGM2-P158	150W (M-102)	Quad-Tap®	25	11.3	T2B-260°C
PGM2-P178	175W (M-137)	Quad-Tap®	25	11.3	T2B-260°C
HIGH PRESSURE SODIUM					
PGM2-S078	70W (S-62)	Quad-Tap®	24	10.9	T3-200°C
PGM2-S108	100W (S-54)	Quad-Tap®	25	11.3	T3-200°C
PGM2-S158	150W (S-55)	Quad-Tap®	25	11.3	T2B-260°C

NOTE: For voltage, change last character in catalog number.
 Example: **PGM2-P175; 5=480V, 6=Tri-Tap® 120/277/347V, E=230V 50 Hz.**

ACCESSORIES (order as separate part #)

Catalog Number	Description
PGPS	Clear Polycarbonate Shield for lens protection
PGWG	Wire Guard, cadmium plated steel
PVLV	Full Cutoff Visor, formed bronze aluminum

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Industrial Lighting

Hubbell Industrial Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000
For more information visit our web site: www.hubbell-ltg.com