

# SUPERBAY WW22 SERIES

22" TRANSLUCENT  
REFLECTOR

Cat. #		Approvals
Job	Type	



## APPLICATIONS


- Field adjustable brackets designed for low to medium mounting heights

## SPECIFICATIONS

- WW22 reflector has a milk-white translucent appearance, hides fingerprints and blends with light-colored ceilings
- The uplight component of the WW22 reflector is minimal at 17% or lower, using just the right amount of uplight to eliminate the cave effect
- Downlight levels are increased, providing more downward light for merchandise, aisles or assembly lines

## LISTINGS

- Up to 55°C ambient. Suitable for damp location, minimum 90°C supply conductors

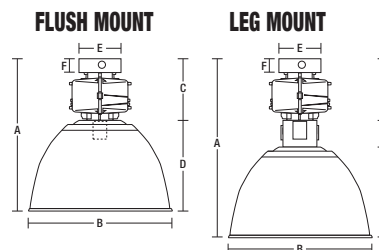


Flush Mount	A	B	C	D	E	F
<b>SLICK-ON®</b>	23 <sup>1</sup> / <sub>2</sub> "	22 <sup>1</sup> / <sub>2</sub> "	9 <sup>1</sup> / <sub>2</sub> "	14"	9 <sup>1</sup> / <sub>2</sub> "	2"
	597 mm	572 mm	241 mm	356 mm	241 mm	51 mm
<b>QUICK-ON®</b>	22 <sup>5</sup> / <sub>8</sub> "	22 <sup>1</sup> / <sub>2</sub> "	8 <sup>5</sup> / <sub>8</sub> "	14"	9 <sup>1</sup> / <sub>2</sub> "	1 <sup>1</sup> / <sub>8</sub> "
	575 mm	572 mm	219 mm	356 mm	241 mm	29 mm

Leg Mount	A	B	C	D	E	F
<b>SLICK-ON®</b>	25 <sup>3</sup> / <sub>4</sub> "-28"	22 <sup>1</sup> / <sub>2</sub> "	9 <sup>1</sup> / <sub>2</sub> "	14"	9 <sup>1</sup> / <sub>2</sub> "	2"
	654-711 mm	572 mm	241 mm	356 mm	241 mm	51 mm
<b>QUICK-ON®</b>	24 <sup>7</sup> / <sub>8</sub> "-27 <sup>1</sup> / <sub>8</sub> "	22 <sup>1</sup> / <sub>2</sub> "	8 <sup>5</sup> / <sub>8</sub> "	14"	9 <sup>1</sup> / <sub>2</sub> "	1 <sup>1</sup> / <sub>8</sub> "
	632-689 mm	572 mm	219 mm	356 mm	241 mm	29 mm

## ORDERING INFORMATION

ORDERING EXAMPLE: BL-400P8-WW22-WH



### SERIES

**BL** Superbay Series

### WATTAGE

**150** 150 watt HPS  
**175** 175 watt only Pulse Start MH only  
**200** 200 watt Pulse Start MH only  
**250** 250 watt MH, Pulse Start MH or HPS  
**320** 320 watt Pulse Start MH only  
**350** 350 watt Pulse Start MH only  
**400** 400 watt Pulse Start MH or HPS  
**450** 450 watt Pulse Start MH only

### SOURCE

**S** High Pressure Sodium  
**P** Pulse Start Metal Halide

### VOLTAGE

**5** 480V  
**6** Tri-Tap® - 120/277/347V  
**8** Quad-Tap® - 120/208/240/277V  
**F** 347V

### OPTICS

**WW22** 22" Wide Translucent Acrylic Reflector

### BOTTOM ENCLOSURES

**WA2-ENC** Bottom Enclosure  
**WA22-CDL** Conical Bottom Enclosure  
**WA22-DLR** Drop Lens Bottom Enclosure

### COLOR

**WH** White (standard)  
**GR** Gray (optional)

### SOCKET

**EX** Exclusionary socket (open rated lamps)

NOTE: Energy Saving Linear Reactor Pulse Start ballast available, consult factory (277V only).  
 NOTE: Bottom enclosures are required unless lamps designated as "suitable for open use" are used.  
 NOTE: Options must be added as suffix to Catalog Number. Accessories must be ordered separately.

## ACCESSORIES

Order separately

### BOTTOM ENCLOSURE

**WA2-ENC** Bottom Enclosure  
**WA22-CDL** Conical Bottom Enclosure  
**WA22-DLR** Drop Lens Bottom Enclosure

### MAX AMBIENT TEMPERATURE CHART

WATTAGE	OPEN	ENCLOSED
250	55°C	55°C
320	55°C	55°C
350	55°C	55°C
400	55°C	55°C
450	55°C	55°C

## ORDERING INFORMATION

### OPTIONS FOR SUPERBAY SERIES

Factory installed — order with fixture by adding suffix.

PLUGS ARE TWIST-LOCK® TYPE AS MANUFACTURED BY HUBBELL WIRING DEVICES.

Suffix	Description
-CFB	Charcoal filter breather
-C4HL	4' Cord, Hook/Loop w/ Quick-On® Hanger - SO cord wired thru hook
-C6HL	6' Cord, Hook/Loop w/ Quick-On® Hanger - SO cord wired thru hook
-C8HL	8' Cord, Hook/Loop w/ Quick-On® Hanger - SO cord wired thru hook
-C10HL	10' Cord, Hook/Loop w/ Quick-On® Hanger - SO cord wired thru hook
-C12HL	12' Cord, Hook/Loop w/ Quick-On® Hanger - SO cord wired thru hook

CORD, HOOK/LOOP & 20A PLUG W/ QUICK-ON® HANGER -  
SO CORD W/ PLUG WIRED THRU HOOK

LENGTH	X=	120V	208V	240V	277V	480V	347V
-C4HLP (X)	4'	1	2	3	4	5	C
-C6HLP (X)	6'	1	2	3	4	5	C
-C8HLP (X)	8'	1	2	3	4	5	C
-C10HLP (X)	10'	1	2	3	4	5	C
-C12HLP (X)	12'	1	2	3	4	5	C

CORD, HOOK/LOOP & 15A PLUG W/ QUICK-ON® HANGER -  
SO CORD W/ PLUG WIRED THRU HOOK

LENGTH	X=	120V	208V	240V	277V	480V	347V
-C4HLPX-15A	4'	1	2	3	4	5	C
-C6HLPX-15A	6'	1	2	3	4	5	C
-C8HLPX-15A	8'	1	2	3	4	5	C
-C10HLPX-15A	10'	1	2	3	4	5	C
-C12HLPX-15A	12'	1	2	3	4	5	C

-C4HLP1-15A	4' Cord, Hook/Loop & 15A 120V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook
-C6HLP1-15A	6' Cord, Hook/Loop & 15A 120V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook
-C8HLP1-15A	8' Cord, Hook/Loop & 15A 120V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook
-C10HLP1-15A	10' Cord, Hook/Loop & 15A 120V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook
-C12HLP1-15A	12' Cord, Hook/Loop & 15A 120V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook
-C4HLP4-15A	4' Cord, Hook/Loop & 15A 277V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook
-C6HLP4-15A	6' Cord, Hook/Loop & 15A 277V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook
-C8HLP4-15A	8' Cord, Hook/Loop & 15A 277V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook
-C10HLP4-15A	10' Cord, Hook/Loop & 15A 277V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook
-C12HLP4-15A	12' Cord, Hook/Loop & 15A 277V Plug w/ Quick-On® Hanger - SO cord w/ plug wired thru hook

CORD, HOOK/LOOP & 20A PLUG W/ SLICK-ON® HANGER -  
SO CORD W/ PLUG WIRED THRU HOOK

LENGTH	X=	120V	208V	240V	277V	480V	347V
-C4HLPSO (X)	4'	1	2	3	4	5	C
-C6HLPSO (X)	6'	1	2	3	4	5	C
-C8HLPSO (X)	8'	1	2	3	4	5	C
-C10HLPSO (X)	10'	1	2	3	4	5	C
-C12HLPSO (X)	12'	1	2	3	4	5	C

Suffix	Description
-C4HLPSO1-15A	4' Cord, Hook/Loop & 15A 120V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook
-C6HLPSO1-15A	6' Cord, Hook/Loop & 15A 120V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook
-C8HLPSO1-15A	8' Cord, Hook/Loop & 15A 120V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook
-C10HLPSO1-15A	10' Cord, Hook/Loop & 15A 120V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook
-C12HLPSO1-15A	12' Cord, Hook/Loop & 15A 120V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook
-C4HLPSO4-15A	4' Cord, Hook/Loop & 15A 277V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook
-C6HLPSO4-15A	6' Cord, Hook/Loop & 15A 277V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook
-C8HLPSO4-15A	8' Cord, Hook/Loop & 15A 277V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook
-C10HLPSO4-15A	10' Cord, Hook/Loop & 15A 277V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook
-C12HLPSO4-15A	12' Cord, Hook/Loop & 15A 277V Plug w/ Slick-On® Hanger - SO cord w/ plug wired thru hook

CORD, HOOK/LOOP & 20A PLUG W/ SLICK-ON® HANGER -  
SINGLE FUSE (incl.) SO CORD W/ PLUG WIRED THRU HOOK

LENGTH	X3=	120V	277V	347V
-C4HLPSOF (X3)	4'	1	4	C
-C6HLPSOF (X3)	6'	1	4	C
-C8HLPSOF (X3)	8'	1	4	C
-C10HLPSOF (X3)	10'	1	4	C
-C12HLPSOF (X3)	12'	1	4	C

CORD, HOOK/LOOP & 20A PLUG W/ SLICK-ON® HANGER -  
DOUBLE FUSE (incl.) SO CORD W/ PLUG WIRED THRU HOOK

LENGTH	X4=	208V	240V	480V
-C4HLPSOFF (X4)	4'	2	3	5
-C6HLPSOFF (X4)	6'	2	3	5
-C8HLPSOFF (X4)	8'	2	3	5
-C10HLPSOFF (X4)	10'	2	3	5
-C12HLPSOFF (X4)	12'	2	3	5

-C4HLSO	4' Cord & Hook/Loop w/ Slick-On® Hanger - SO cord wired thru hook
-C6HLSO	6' Cord & Hook/Loop w/ Slick-On® Hanger - SO cord wired thru hook
-C8HLSO	8' Cord & Hook/Loop w/ Slick-On® Hanger - SO cord wired thru hook
-C10HLSO	10' Cord & Hook/Loop w/ Slick-On® Hanger - SO cord wired thru hook
-C12HLSO	12' Cord & Hook/Loop w/ Slick-On® Hanger - SO cord wired thru hook

Suffix	Description						
	CORD, HOOK/LOOP W/ SLICK-ON® HANGER - SINGLE FUSE (incl.) SO CORD W/ PLUG WIRED THRU HOOK						
	<b>LENGTH</b>	<b>X2=</b>	<b>120V</b>	<b>277V</b>	<b>347V</b>		
<b>-C4HLSOF (X2)</b>	4'		<b>1</b>	<b>4</b>	<b>C</b>		
<b>-C6HLSOF (X2)</b>	6'		<b>1</b>	<b>4</b>	<b>C</b>		
<b>-C8HLSOF (X2)</b>	8'		<b>1</b>	<b>4</b>	<b>C</b>		
<b>-C10HLSOF (X2)</b>	10'		<b>1</b>	<b>4</b>	<b>C</b>		
<b>-C12HLSOF (X2)</b>	12'		<b>1</b>	<b>4</b>	<b>C</b>		
	CORD, HOOK/LOOP W/ SLICK-ON® HANGER - DOUBLE FUSE (incl.) SO CORD W/ PLUG WIRED THRU HOOK						
	<b>LENGTH</b>	<b>X3=</b>	<b>208V</b>	<b>240V</b>	<b>480V</b>		
<b>-C4HLSOFF (X3)</b>	4'		<b>2</b>	<b>3</b>	<b>5</b>		
<b>-C6HLSOFF (X3)</b>	6'		<b>2</b>	<b>3</b>	<b>5</b>		
<b>-C8HLSOFF (X3)</b>	8'		<b>2</b>	<b>3</b>	<b>5</b>		
<b>-C10HLSOFF (X3)</b>	10'		<b>2</b>	<b>3</b>	<b>5</b>		
<b>-C12HLSOFF (X3)</b>	12'		<b>2</b>	<b>3</b>	<b>5</b>		
	DEAD FRONT DISCONNECT - incl. CORD, LOOP & DEAD FRONT DISCONNECT PLUG W/ QUICK-ON® HANGER - 15" SO cord factory wired to fixture; order w/ <b>PHS-XXXL</b> (see mounting access.)						
	<b>X1=</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>	<b>480V</b>	<b>347V</b>
<b>-DFP (X1)</b>		<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>F</b>
	DEAD FRONT DISCONNECT W/ SINGLE FUSE - incl. CORD, LOOP & DEAD FRONT DISCONNECT PLUG PLUS SINGLE FUSE BLOCK (fuse incl.) W/ QUICK-ON® HANGER - 15" SO cord factory wired to fixture; order w/ <b>PHS-XXXL</b> (see mounting access.)						
	<b>X3=</b>	<b>120V</b>	<b>277V</b>	<b>347V</b>			
<b>-DFPF (X3)</b>		<b>1</b>	<b>4</b>	<b>F</b>			
	DEAD FRONT DISCONNECT W/ DOUBLE FUSE - incl. CORD, LOOP & DEAD FRONT DISCONNECT PLUG PLUS DOUBLE FUSE BLOCK (fuse incl.) W/ QUICK-ON® HANGER - 15" SO cord factory wired to fixture; order w/ <b>PHS-XXXL</b> (see mounting access.)						
	<b>X4=</b>	<b>208V</b>	<b>240V</b>	<b>480V</b>			
<b>-DFPFF (X4)</b>		<b>2</b>	<b>3</b>	<b>5</b>			
	DEAD FRONT DISCONNECT - incl. CORD, LOOP & DEAD FRONT DISCONNECT PLUG W/ SLICK-ON® HANGER - 15" SO cord factory wired to fixture; order w/ <b>PHS-XXXL</b> (see mounting access.)						
	<b>X1=</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>	<b>480V</b>	<b>347V</b>
<b>-DFPSO (X1)</b>		<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>F</b>
	DEAD FRONT DISCONNECT W/ SINGLE FUSE - incl. CORD, LOOP & DEAD FRONT DISCONNECT PLUG PLUS SINGLE FUSE BLOCK (fuse incl.) W/ SLICK-ON® HANGER - 15" SO cord factory wired to fixture; order w/ <b>PHS-XXXL</b> (see mounting access.)						
	<b>X3=</b>	<b>120V</b>	<b>277V</b>	<b>347V</b>			
<b>-DFPSOF (X3)</b>		<b>1</b>	<b>4</b>	<b>F</b>			
	DEAD FRONT DISCONNECT W/ DOUBLE FUSE - incl. CORD, LOOP & DEAD FRONT DISCONNECT PLUG PLUS DOUBLE FUSE BLOCK (fuse incl.) W/ SLICK-ON® HANGER - 15" SO cord factory wired to fixture; order w/ <b>PHS-XXXL</b> (see mounting access.) (not for Canada)						
	<b>X3=</b>	<b>208V</b>	<b>240V</b>	<b>480V</b>			
<b>-DFPSOFF (X3)</b>		<b>2</b>	<b>3</b>	<b>5</b>			

Suffix	Description							
<b>-EM</b>	Emergency Circuit Complete w/ Slick-On® hanger - D.C. bayonet base, 120V quartz socket; for connection by customer to separate power supply							
	FLEXIBLE WIRE SYSTEM FIXTURE CORD (CANADA ONLY)							
	<b>LENGTH</b>	<b>X1=</b>	<b>120V</b>	<b>208V</b>	<b>240V</b>	<b>277V</b>	<b>480V</b>	<b>347V</b>
<b>-FC3X1</b>	3'		<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>C</b>
<b>-FC6X1</b>	6'		<b>1</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>C</b>
<b>-GR</b>	Gray Lektrocote® Finish on housing; replace <b>-WH</b> in catalog number							
<b>-JP</b>	Job Pack - master carton packaging of ballast housing to reduce corrugated waste disposal; for shipment to jobsite only							
<b>-LRI<sup>1</sup></b>	Lower Luminaire Retainer - a snap-in cable on housing secures reflector to ballast housing							
<b>-MMM</b>	No Mounting Method - neither Slick-On® nor Quick-On® provided w/ luminaire. Mounting method must be ordered as an accessory; option used for applications requiring mounting method supplied in advance of luminaire							
<b>-P</b>	High Strength Polycarbonate Refractor							
<b>-QSS</b>	Quartz Standby System - ON when power is restored, OFF when HID lamp restrikes. Wattage of quartz lamp (not incl.) may not exceed wattage of HID lamp (250W max. recommended). Uses 120V DC bayonet base lamp. Factory wired.							
<b>-QST</b>	Quartz Standby with Time Delay - ON when power is restored, OFF when HID lamp restrikes and is warmed up. Wattage not to exceed wattage of HID lamp (250W max. recommended). Uses 120V DC bayonet base lamp. Factory wired.							
<b>-SLD-1</b>	Switch Level Dimming with 120V control							
<b>-SLD-2</b>	Switch Level Dimming with 24V control							
<b>-SLD-3</b>	Switch Level Dimming with 120 or 277V control (Direct Control)							
<b>-SO</b>	Slick-On® Thru Wire Outlet Box for 3/4" pendant or 1/2" or 3/4" side entry conduit							
	SLICK-ON® THRU WIRE OUTLET BOX, SINGLE FUSE (incl.) for 3/4" pendant or side entry conduit							
	<b>X3=</b>	<b>120V</b>	<b>277V</b>	<b>347V</b>				
<b>-SOF (X3)</b>		<b>1</b>	<b>4</b>	<b>F</b>				
	SLICK-ON® THRU WIRE OUTLET BOX, DOUBLE FUSE (incl.) for 3/4" pendant or side entry conduit (not for Canada)							
	<b>X4=</b>	<b>208V</b>	<b>240V</b>	<b>480V</b>				
<b>-SOFF (X4)</b>		<b>2</b>	<b>3</b>	<b>5</b>				
<b>-TRI(X)</b>	Top Luminaire Retainer - chain secures ballast housing to structure when additional safety precautions are required. Shipped in housing carton. Specify length (X), recommended maximum slack is 3"							

<sup>1</sup> Luminaire retainers/safety cables reduce risk of equipment falling

**NOTE:** For specific applications, bottom enclosures may be required. For more information, please see specific lamp manufacturers' data and the NEMA white paper "Best Practices for Metal Halide Lighting Systems" posted on the NEMA web site ([www.nema.org](http://www.nema.org)).

**WARNING:** Improper selection, installation, operation, servicing, removal, and disposal of lighting products may create serious hazardous including fires, explosions, shock, burns, cuts, impaired vision, falling objects, and environmental contamination. Reduce risks by using the guidance of licensed professionals throughout the product life cycle, and following individual product, component, and accessory safety instructions and labels.

We offer this in the interest of safety for our customers, who may not be aware of the potentially high risk involved in the misuse of these products.

## ORDERING INFORMATION

### ACCESSORIES

(order separately)

Catalog #	Description
<b>B-LLR<sup>1</sup></b>	Lower Luminaire Retainer - 2' cable secures reflector to ballast housing
<b>B-TLR(6)<sup>1</sup></b>	6' Top Luminaire Retainer - chain secures ballast housing to structure when additional safety precautions are required
<b>B-TLR(10)<sup>1</sup></b>	10' Top Luminaire Retainer - chain secures ballast housing to structure when additional safety precautions are required
<b>B-TLR(12)<sup>1</sup></b>	12' Top Luminaire Retainer - chain secures ballast housing to structure when additional safety precautions are required
<b>B-TLR(16)<sup>1</sup></b>	16' Top Luminaire Retainer - chain secures ballast housing to structure when additional safety precautions are required
<b>WA2-ENC<sup>2</sup></b>	22" Acrylic Lens, corrosion-resistant steel lens ring (not dust tight) required for 175, 250, 320 & 350 watt metal halide luminaires; for WW22 reflector only
<b>BL-QO</b>	Quick-On 3/4" pendant mount
<b>BL-SO</b>	Slick-On Thru Wire Outlet Box for 3/4" pendant or 3/4, 1/2 side entry conduit
<b>BL-SOF</b>	Slick-On Single Fusing (fuse not incl.) thru wire outlet box for 3/4" pendant or 3/4, 1/2 side entry conduit mount with single fuse holder
<b>BL-SOFF</b>	Slick-On Double Fusing (fuses not incl.) thru wire outlet box for 3/4" pendant or 3/4, 1/2 side entry conduit mount with double fuse holder (not for Canada)
<b>WG-23</b>	23" Wireguard - corrosion resistant, welded steel w/ center lamp access

<sup>1</sup> Luminaire retainers/safety cables reduce risk of equipment falling.

<sup>2</sup> Bottom enclosures are required unless lamps designated as "suitable for open use" are used.

### MOUNTING ACCESSORIES

(order separately)

PLUGS ARE TWIST-LOCK® TYPE AS MANUFACTURED BY HUBBELL WIRING DEVICES.

Catalog #	Description
<b>BLA-C4HLP-1</b>	4' Cord, Hook/Loop and 120V 20A Twist-Lock® Plug
<b>BLA-C4HLP-4</b>	4' Cord, Hook/Loop and 277V 20A Twist-Lock® Plug
<b>BLA-C4HLP1-15A</b>	4' Cord, Hook/Loop and 120V 15A Twist-Lock® Plug
<b>BLA-C4HLP4-15A</b>	4' Cord, Hook/Loop and 277V 15A Twist-Lock® Plug
<b>HOOK/LOOP<sup>1</sup></b>	Hook - cast aluminum 3/4" NPS male; includes safety screw; converts to Loop with strap included
<b>H3/4AL3/4<sup>1</sup></b>	Swivel Aligner - complete with box for thru wiring; all hubs tapped for 3/4" conduit - 25° swivel
<b>PHE-XXX<sup>1</sup></b>	Die Cast Aluminum Power Hook with 20A Twist-Lock® Receptacle - ceiling or 3/4" pendant mount, with 3/4" side entry for thru wiring 15" Cord, Hook/Loop & Twist-Lock® Plug (20 amp) included (for voltage replace XXX with 120, 208, 240, 277, 347, or 480)
<b>PHE-XXX-L<sup>2</sup></b>	As above, except cord, loop & plug not included (for voltage replace XXX with 120, 208, 240, 277, 347, or 480)
<b>PHS-XXX</b>	Specification Grade Power Hook - 30" cord dead front plug & receptacle with isolated wiring chamber; ceiling or 3/4" pendant mount, with 3/4" side entry for thru wiring; special safety feature locks Hook/Loop onto bottom hook (for voltage replace XXX with 120, 208, 240, 277, 347, or 480)
<b>PHS-XXX-L<sup>1,3</sup></b>	Specification Grade Power Hook - dead front receptacle with isolated wiring chamber; ceiling or 3/4" pendant mount, with 3/4" side entry for thru wiring; Cord, Hook/Loop and Dead Front Plug not included, must be ordered with luminaire (for voltage replace XXX with 120, 208, 240, 277, 347, or 480)
<b>SY3-XXX-2</b>	Rugged Steel Power Hook with 20A Twist-Lock® Receptacle - pendant or surface mount, 3/4" thru wiring capability; 30" Cord, Hook/Loop and Plug (20 amp) included (for voltage replace XXX with 120, 208, 240, 277, 347, or 480)
<b>SY3-XXX-L<sup>2</sup></b>	Porta-Hook includes integral mounting hook and 20A Twist-Lock® Receptacle; 3/4" knockouts on top and two sides; Cord, Hook/Loop and Plug (20 amp) not included (for voltage replace XXX with 120, 208, 240, 277, 347, or 480)

<sup>1</sup> CSA certified.

<sup>2</sup> Cord, Hook/Loop and Plug must be added to fixture as option, example: **-C2HLP4**.

<sup>3</sup> Cord, Hook/Loop and Dead Front Plug must be added to fixture as option, example: **-DFP4**.

NOTE: Cord used with above accessories is 16/3 SOWA 105°C NEMA configurations.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.



Hubbell Industrial Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • PHONE: 864-678-1000

For more information visit our web site: [www.hubbell-iltg.com](http://www.hubbell-iltg.com)

Industrial Lighting